

## Model

# 260MRT

## MINI ROUGH TERRAIN SCISSOR LIFT

JLG®

### Features

- 65 x 102 in. (1.65 x 2.59 m) Steel Platform
- 4 ft (1.22 m) Manual Roll-Out Deck Extension
- Fold-Down Platform Rails
- Moveable, Removable Platform Control Box
- Cross Corner Four-wheel Drive
- Proportional Hydrostatic Drive
- Control with Thumb Steer
- Proportional Lift Up
- 110V-AC Receptacle in Platform Horn
- Horn
- Hourmeter
- 3 Degree Slope Alarm and Light
- Lubrication-Free Scissor Arm Bushings
- Scissor Maintenance Prop
- Manual Descent Pull Cable
- Heavy Gauge Steel Chassis Hoods
- Nickel Plated Pins, Yellow Zinc-Chromate Plated Fasteners
- 26 x 12 in. Lug Tread Tires
- All Motion Alarm

### Accessories & Options

- 26 x 12 Foam Filled Tires
- Platform Work Lights
- Full Swing-Gate
- 110V-AC Generator
- Flashing Beacon
- 33.5 lb (19.73 kg) Propane Tank
- Hydraulic Leveling Jacks



### Exceptional mobility on or off slab

- Narrow 69-inch chassis fits into tight spaces
- Standard cross corner four-wheel drive with 35% gradeability




### Larger work platform, high capacity

- Large 65 x 102 in. deck space with 4-foot roll-out deck extension
- 1,250-pound platform capacity and up to 300 lb on the platform extension

### Service and reliability

- Simplified ground control wiring for ease of service
- Automatic transmission control and full diagnostics

### Specifications

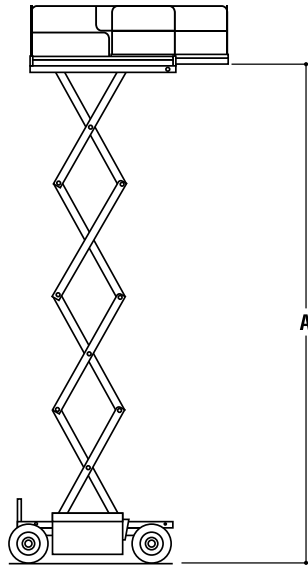

#### Dimensions

A. Platform Height Elevated	26 ft (7.92 m)
B. Platform Height Lowered	4 ft 1.5 in. (1.26 m)
C. Platform Railing Height	3 ft 7.5 in. (1.1 m)
D. Overall Height	7 ft 9.5 in. (2.37 m)
E. Platform Size	65 x 102 in. (1.65 x 2.59 m)
F. Platform Extension	4 ft (1.22 m)
G. Overall Width	5 ft 9 in. (1.75 m)
H. Overall Length (no outriggers)	8 ft 9 in. (2.67 m)
I. Wheelbase	6 ft 6 in. (1.98 m)
J. Ground Clearance	8 in. (20 cm)
Platform Capacity	1,250 lb (567 kg)
Capacity on Deck Extension	300 lb (136 kg)
Lift/Lower Speed	27/21 sec.
Maximum Drive Height	Full Height
Gross Vehicle Weight	7,360 lb (3,338 kg)

#### Chassis

Drive Speed-Lowered	3.5 mph (5.6 kmph)
Drive Speed-Elevated	0.4 mph (0.6 kmph)
Gradeability	35%
Turning Radius (inside)	84 in. (2.13 m)
Tire Size/Type	26 x 12 Lug Tread
Brakes	Spring Applied Hydraulically Released

#### Power system

Dual Fuel Engine	Kubota 24.5 hp (18.3 kW)
Diesel Engine	Kubota 22.5 hp (16.8 kW)
Fuel Tank Capacity	7.5 gal. (28.39 L)
Hydraulic Reservoir	15 gal. (56.78 L)



*Standard Cross Corner Four-Wheel Drive for Terrainability*



*Strengthened Arm Stack for Improved Stack Rigidity*

#### The JLG "1 & 5" Warranty

JLG Industries, Inc. backs our products with our exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year, and cover all specified major structural components for five (5) full years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable OSHA Regulations in 29 CFR 1910.67, 29 CFR 1926.453 and ANSI A92.6-2006 as originally manufactured for intended applications.



#### JLG Industries, Inc.

1 JLG Drive  
McConnellsburg, PA 17233-9533  
Telephone 717-485-5161  
Toll-free in US 877-JLG-LIFT  
Fax 717-485-6417

[www.jlg.com](http://www.jlg.com)

An Oshkosh Corporation Company